
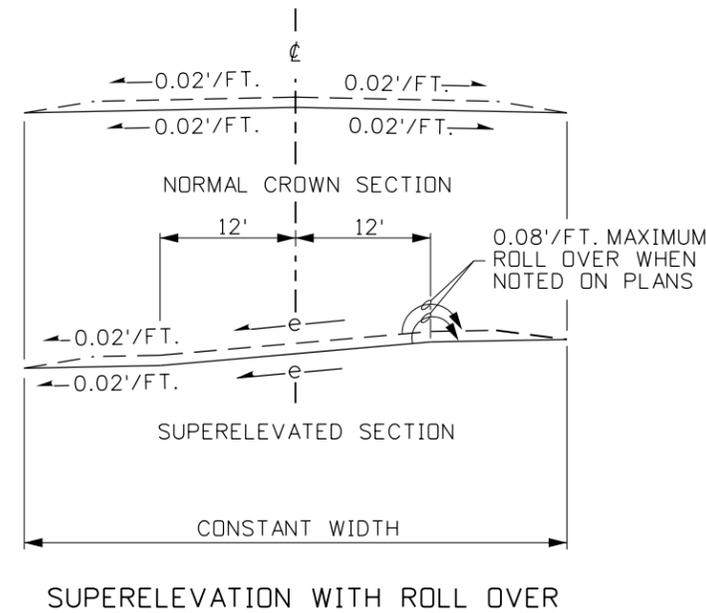
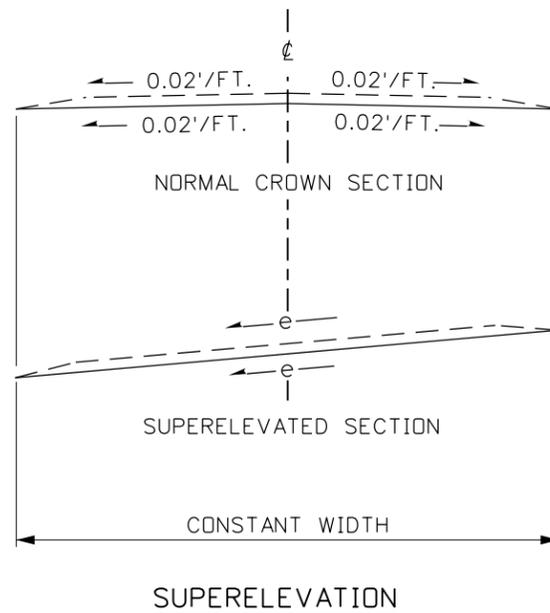


SLOPE GRADING

NOTES

1. FOR THE 30' CATCH POINT CONTROL DISTANCE:
 USE 6:1 SLOPE FOR CUTS AND FILLS UP TO 5.0' IN HEIGHT.
 USE VARIABLE SLOPES FOR CUTS AND FILLS OVER 5.0' AND UP TO 15' IN HEIGHT MAINTAINING THE CONSTANT 30' CATCH POINT DISTANCE.
 USE 2:1 SLOPE FOR CUTS AND FILLS OVER 15' IN HEIGHT.
 SLOPES SHOWN ARE MAXIMUM, FLATTER SLOPES SHOULD BE USED WHEN FEASIBLE.
2. CUT AND FILL SLOPES IN DIFFICULT TERRAIN MAY REQUIRE SPECIAL CONSIDERATION.
3. SLOPE ROUNDING SHALL CONSIST OF ONE OR MORE CHORDS OR ROUNDED SURFACE. THE DEPTH AND WIDTH OF SLOPE ROUNDING SHALL BE AS DIRECTED.
4. ROLL OVER WILL NOT BE USED UNLESS NOTED ON THE PLANS.
5. SLOPE TREATMENT SHALL BE AS SHOWN ON THE PLANS OR AS DIRECTED.
6. ALL SLOPES SHALL BE CHECKED TO DETERMINE IF THERE IS A GUARDRAIL WARRANT BASED ON SLOPE HEIGHT AND STEEPNESS.
7. ROADSIDE SLOPE TREATMENT SHALL BE AS SHOWN ON STANDARD DRAWING A-6 AND/OR AS DIRECTED ON THE PLANS.
8. WHEN USING GUARDRAIL, WIDEN SHOULDER AS SHOWN ON THE APPROPRIATE ITD GUARDRAIL STANDARD DRAWING.
9. DRAWING NOT TO SCALE.

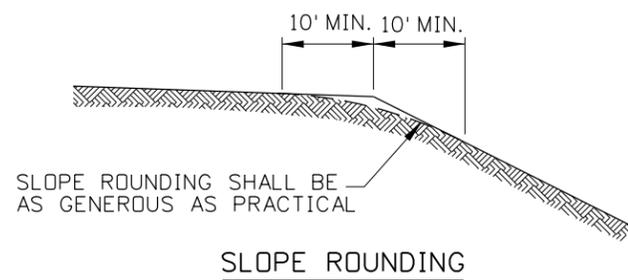

ORIGINAL STORED AT: ITD, Headquarters 3311 West State Boise, Idaho

ORIGINAL SIGNED BY:
 DATE: TED E. MASDN
 MAY 28, 2015

REVISIONS								
NO.	DATE	BY	NO.	DATE	BY	NO.	DATE	BY
1	09-65		6	03-90	GB	11	07-09	GAM
2	10-66		7	04-93	MSM	12	05-15	PJF
3	02-69		8	01-00	MSM			
4	02-83		9	07-03	MSM			
5	03-87		10	06-05	MSM			

SCALES SHOWN ARE FOR 11" X 17" PRINTS ONLY
 CADD FILE NAME: a3_0515.dgn
 DRAWING DATE: OCTOBER, 1966

IDAHO TRANSPORTATION DEPARTMENT

BOISE IDAHO

ORIGINAL SIGNED BY: KEVIN SABLAN
 DESIGN/TRAFFIC SERVICES ENGINEER

STANDARD DRAWING
RURAL MINOR ARTERIAL GRADING

English
 STANDARD DRAWING NO.
A-3
 SHEET 1 OF 1