


PREFERRED GRADING

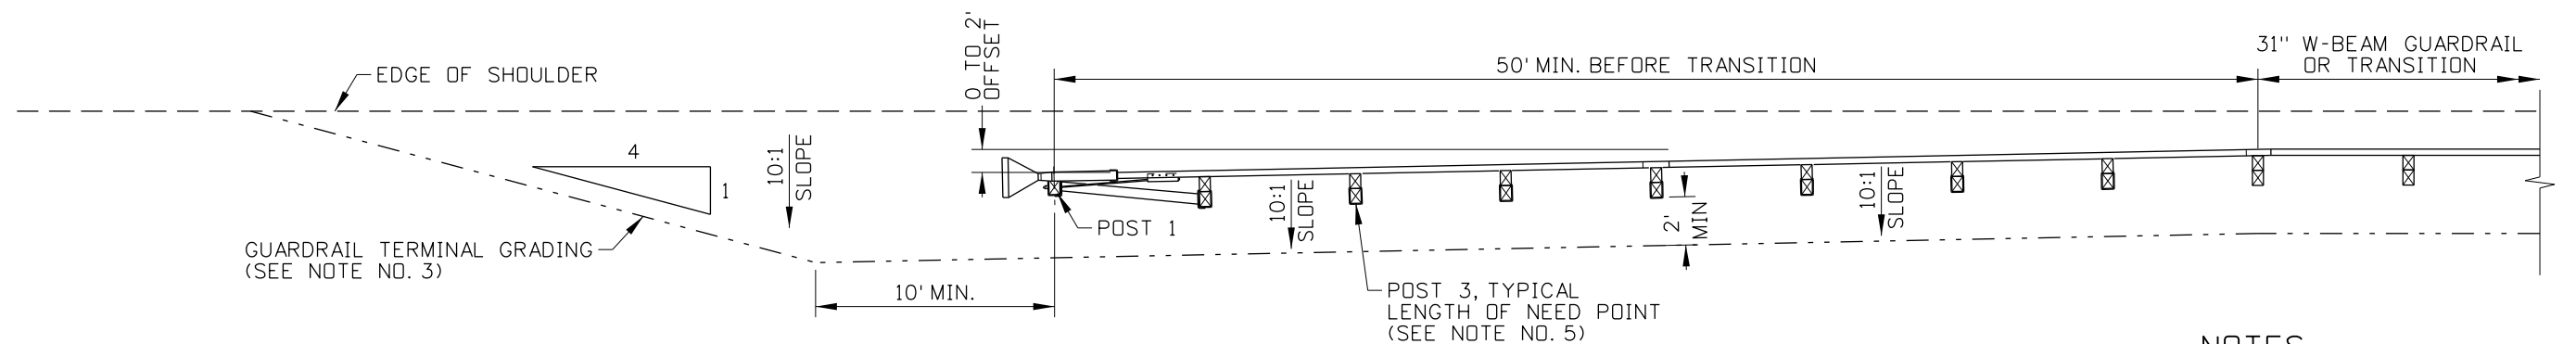

ALTERNATIVE GRADING

NOTES

1. THE TANGENT TERMINAL SHOWN IS AN EXAMPLE ONLY. TANGENT TERMINAL DESIGNS VARY BY PRODUCT AND MANUFACTURER.
2. USE THE PREFERRED GRADING LAYOUT WHEN PRACTICAL. THE ALTERNATIVE GRADING LAYOUT MAY BE USED WHEN UPGRADING AN EXISTING TERMINAL WITH SITE LIMITATIONS. DISTANCES SHOWN FROM THE TERMINAL POSTS TO THE GRADING EXTENTS ARE MEASURED FROM THE BACK OF THE POST.
3. PROVIDE A 4:1 OR FLATTER SLOPE OUTSIDE OF THE GUARDRAIL TERMINAL GRADING EXTENTS WHERE PRACTICAL.
4. INSTALL THE TERMINAL IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTIONS. REFER TO THE MANUFACTURERS INSTALLATION INSTRUCTIONS WHEN A TANGENT TERMINAL IS TO BE INSTALLED ON A HORIZONTAL CURVE.
5. MOST TANGENT TERMINALS ARE REDIRECTIVE AT POST 3. VERIFY THE LENGTH OF NEED POINT WITH THE MANUFACTURER FOR A SPECIFIC PRODUCT. ELEMENTS OF THE GUARDRAIL TERMINAL DOWNSTREAM OF THE LENGTH OF NEED POINT CAN BE INCLUDED AS PART OF THE LENGTH OF NEED.
6. IF THE TANGENT TERMINAL DESIGN USES AN ANCHOR CABLE, INSTALL AN EXTRA HEX NUT ON EACH END OF THE CABLE.
7. AFFIX A TYPE 3 OBJECT MARKER TO THE TERMINAL END SECTION.
8. DRAWING NOT TO SCALE.

ORIGINAL STORED AT: ITD, Headquarters 3311 West State Boise, Idaho

ORIGINAL SIGNED BY:
RYAN D. LANCASTER
DATE ORIGINAL SIGNED:
JUNE 9, 2017

| REVISIONS | | | | | | | | |
|-----------|------|----|-----|------|----|-----|------|----|
| NO. | DATE | BY | NO. | DATE | BY | NO. | DATE | BY |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

SCALES SHOWN ARE FOR 11" X 17" PRINTS ONLY
CADD FILE NAME: 612-8_0617.dgn
DRAWING DATE: JUNE, 2017

IDAHO TRANSPORTATION DEPARTMENT



BOISE IDAHO

ORIGINAL SIGNED BY: KEVIN SABLAN
DESIGN/TRAFFIC SERVICES ENGINEER

STANDARD DRAWING
GUARDRAIL TERMINAL TANGENT

English
STANDARD DRAWING NO.
612-8
SHEET 1 OF 1