

GENERAL NOTES

CONSTRUCTION SPECIFICATIONS

MATERIALS, CONSTRUCTION AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE STATE OF IDAHO TRANSPORTATION DEPARTMENT, "STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION", 2004 EDITION, THE PROJECT PLANS AND SPECIFICATIONS UNLESS NOTED OTHERWISE. THE ENGLISH UNITS SYSTEM OF MEASUREMENT SHALL BE USED AS STANDARD.

MATERIAL

CONCRETE : DECK SLAB AND PARAPET - CLASS 40A ----- f'c = 4.00 ksi
ABUTMENTS AND WINGS - CLASS 40B ----- f'c = 4.00 ksi
PRESTRESS GIRDERS ----- f'c = X.XX ksi
METAL REINFORCEMENT : AASHTO M31, GRADE 60 ----- fy = 60.00 ksi
PRESTRESSING REINFORCEMENT : AASHTO M203, GRADE 270 LOW RELAXATION ---- fpu = 270.00 ksi

PLAN DIMENSIONS AND ELEVATIONS

ALL EXPOSED EDGES OF CONCRETE SHALL BE BEVELED 3/4" UNLESS NOTED OTHERWISE.
ALL DIMENSIONS TO REINFORCING STEEL ARE TO CENTERLINE OF BAR UNLESS NOTED OTHERWISE.
CONCRETE COVER MEASURED FROM THE FACE OF THE CONCRETE TO THE FACE OF ANY REINFORCING BAR SHALL BE 2", UNLESS SHOWN OTHERWISE ON THE DRAWINGS.

CONSTRUCTION

ALL REINFORCING STEEL TO BE EPOXY COATED IS DESIGNATED BY AN "E" AFTER THE BAR MARK.
CONSTRUCTION JOINTS WILL BE PERMITTED ONLY AT THE LOCATIONS SHOWN ON THE PLANS OR AS APPROVED BY THE ENGINEER.
THE ROLLER SHALL BE IN STATIC MODE FOR COMPACTING THE ASPHALT WEARING SURFACE ON THE BRIDGE.
ANY SHORING SYSTEM THAT IMPACTS THE RAILROAD'S OPERATION AND/OR SUPPORTS THE RAILROAD'S EMBANKMENT SHALL BE DESIGNED AND CONSTRUCTED PER RAILROAD GUIDELINES FOR TEMORARY SHORING.
ALL DEMOLITION WITHIN THE RAILROAD'S RIGHT-OF-WAY AND/OR DEMOLITION THAT MAY IMPACT THE RAILROAD'S TRACKS OR OPERATIONS SHALL COMPLY WITH THE RAILROAD'S DEMOLITION REQUIREMENTS.
ERECTION OVER THE RAILROAD'S TRACK SHALL BE PLANNED SUCH THAT IT ENABLES THE TRACK(S) TO REMAIN OPEN TO TRAFFIC PER RAILROAD REQUIREMENTS.
THE ELEVATION OF THE EXISTING TOP-OF-RAIL PROFILE SHALL BE VERIFIED BEFORE BEGINNING CONSTRUCTION.
ALL DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE RAILROAD PRIOR TO CONSTRUCTION.
THE PROPOSED GRADE SEPARATION PROJECT SHALL NOT CHANGE THE QUANTITY AND/OR CHARACTERISTICS OF THE FLOW IN THE RAILROAD DITCHES AND/OR DRANAGE STRUCTURES.
THE CONTRACTOR MUST SUBMIT A PROPOSED METHOD OF EROSION AND SEDIMENT CONTROL AND HAVE THE METHOD APPROVED BY THE RAILROAD PRIOR TO BEGINNING ANY GRADING ON THE PROJECT SITE.
FOR RAILROAD COORDINATION PLEASE REFER TO THE RAILROAD'S COORDINATION REQUIREMENTS AS PART OF THE SPECIFICATIONS OR SPECIAL PROVISIONS OF THE PROJECT.
TEMPORARY CONSTRUCTION CLEARANCES,INCLUDING FALSEWORK CLEARANCES,SHALL COMPLY WITH FIGURE 1.
ALL PERMANENT CLEARANCES SHALL BE VERIFIED BEFORE PROJECT CLOSEOUT.

INCIDENTAL ITEMS

ALL ITEMS SHOWN OR NOTED ON PLANS WHICH ARE NOT SPECIFICALLY BID ITEMS ARE CONSIDERED INCIDENTAL ITEMS. THE COST OF FURNISHING AND INSTALLING ALL INCIDENTAL ITEMS WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE UNIT PRICE BID FOR OTHER ITEMS, UNLESS NOTED OTHERWISE.

MSE WALLS


MSE WALLS SHALL BE DESIGNED IN ACCORDANCE WITH THE LATEST AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES, DIVISION 1 DESIGN, SECTION 5, RETAINING WALLS, PARTS A AND B. THE FOLLOWING TABLE SUMMARIZES THE SOIL INFORMATION TO BE USED IN THE WALL DESIGN. OTHER INFORMATION NEEDED FOR THE WALL DESIGN CAN BE FOUND IN THE ITD FOUNDATION INVESTIGATION REPORT AVAILABLE AT THE DISTRICT OR HQ MATERIALS OFFICE.

MSE WALL DESIGN PARAMETERS				
SOIL	WET UNIT WEIGHT (pcf)	COHESION (psf)	FRICTION ANGLE (DEGREE)	ALLOWABLE BEARING CAPACITY (ksf)
WALL BACKFILL	*	*	*	N/A
RETAINED SOIL				N/A
FOUNDATION SOIL DENSE SAND & GRAVEL				
FOUNDATION SOIL GRANULAR FILL				

* - TO BE DETERMINED BY THE CONTRACTOR

ELASTOMERIC BEARINGS

DESIGN PROCEDURE: METHOD -
GRADE 4 - DUROMETER POLYISOPRENE
GRADE 3 - DUROMETER POLYCHLOROPRENE
DESIGN LOADS: (SERVICE 1)
ABUTMENT xxx kips
PIER xxx kips

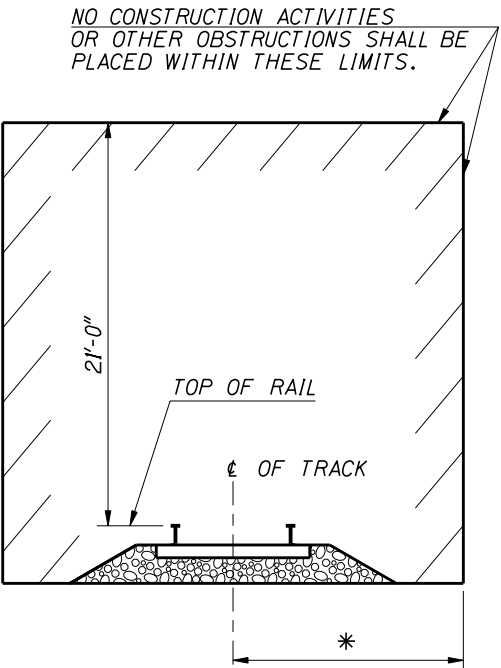

* 15'-0" FOR BNSF AND 12'-0" FOR UPRR

FIGURE 1
MINIMUM CONSTRUCTION CLEARANCE ENVELOPE
(NORMAL TO RAILROAD)

REVISIONS				DESIGNED	SCALES SHOWN ARE FOR 34" X 22" PRINTS ONLY	ORIGINAL SIGNED BY:	IDAHO TRANSPORTATION DEPARTMENT		<i>English</i>	DESIGN AND GENERAL NOTES 2 OF 2	BRIDGE PLANS	
NO.	DATE	BY	DESCRIPTION	DESIGN CHECKED							BRIDGE LRFD MANUAL, PAGE B17.1B	
△				DETAILED	CADD FILE NO. \\prj00000\bridge\ b17_lb.dgn	DATE SIGNED: <u>DATE</u>		PROJECT NO.	PRECAST, P/S GIRDER BRIDGE RAILROAD BRIDGE	COUNTY	KEY NO.	
△				DWG. CHECKED						BRIDGE DRAWING NO.	SHEET	
△				CORRECTIONS	DRAWING DATE: APR 2008	OF						
△					ORIGINAL STORED AT: ITD-BRIDGE SECTION							