



PLAN
1 1/2" = 1'-0"


- NOTES:
- DO NOT PLACE CONCRETE WATERPROOFING SYSTEM WITHIN LIMITS OF PLUG JOINT. WATERPROOFING SYSTEM MAY BE PLACED ON TAR PAPER TO ALLOW REMOVAL BEFORE PLACING PLUG JOINT MATERIAL.
 - PROVIDE JOINT SEALANT THAT MEETS THE REQUIREMENTS OF ASTM C920 FOR TYPE M, GRADE P, CLASS 100/50 AND USE T, AND MEETS ASTM C719 FOR TEST MOVEMENTS +100% AND -50% OF THE JOINT WIDTH AS TESTED BY AN INDEPENDENT TESTING FACILITY.

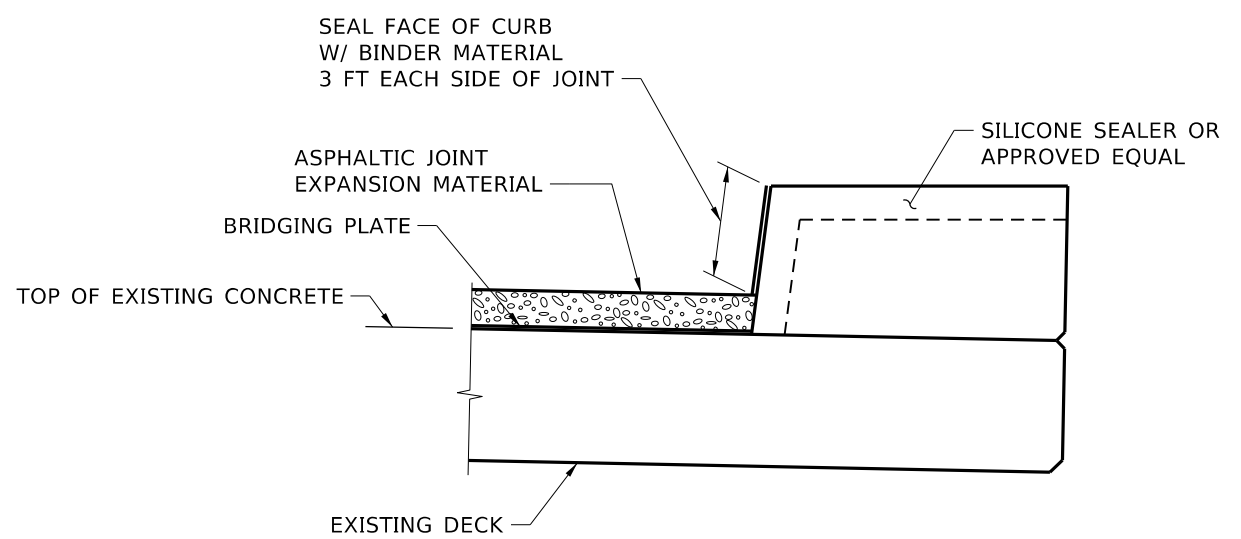

SECTION B-B W/ CURB
1 1/2" = 1'-0"

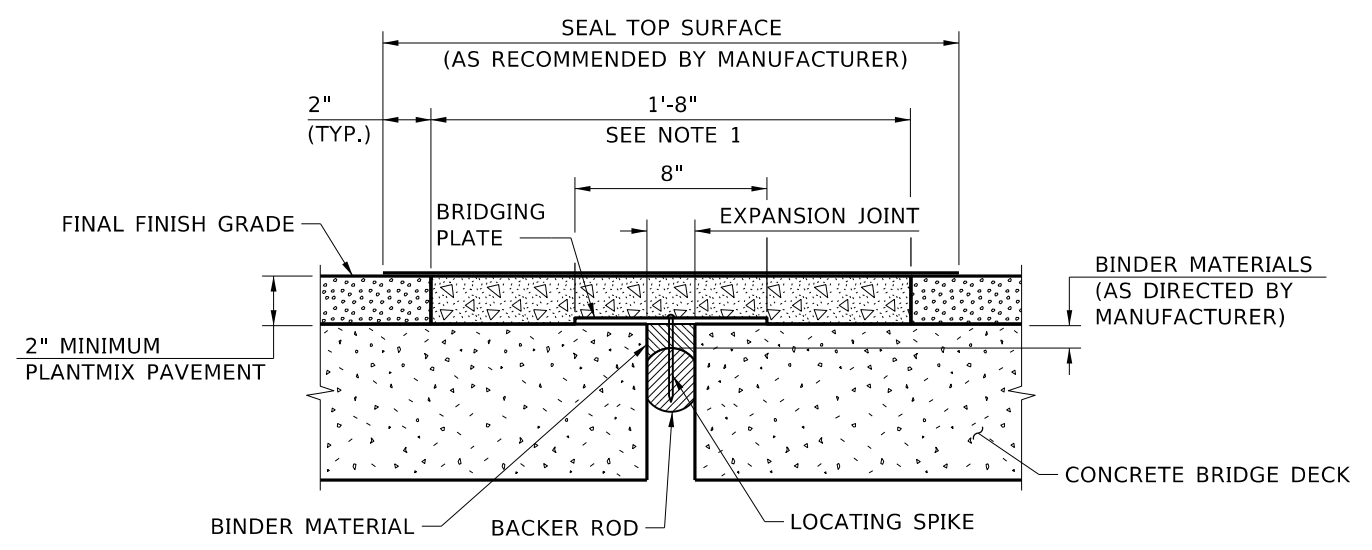

SECTION A-A
1 1/2" = 1'-0"

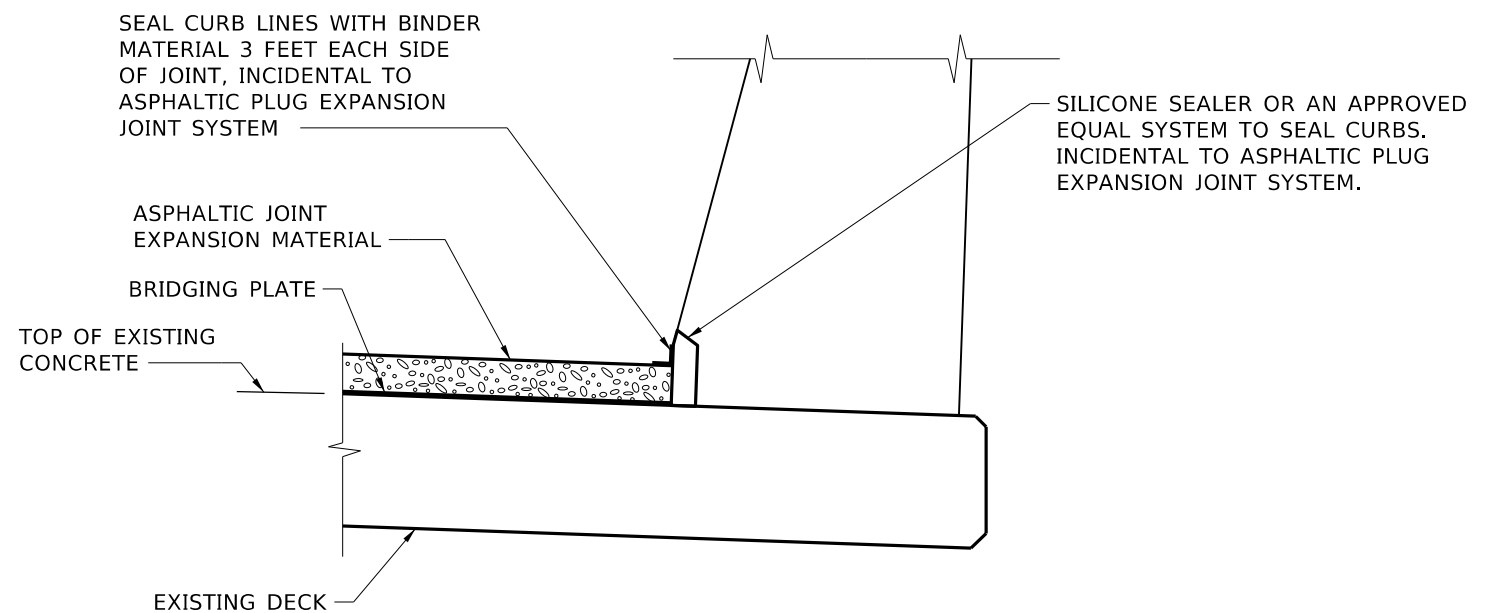

SECTION B-B W/ CONCRETE PARAPET
1 1/2" = 1'-0"

ORIGINAL STORED AT: ITD BRIDGE SECTION - Boise, Idaho

REVISIONS			
NO.	DATE	BY	DESCRIPTION

DESIGNED
DESIGN CHECKED
DETAILED
DWG. CHECKED
CORRECTIONS

SCALES SHOWN ARE FOR 11" X 17" PRINTS ONLY
CADD FILE NAME
Standards\Bridg Standard Drawings\B14_6.DGN
DRAWING DATE:
JUNE 2022

IDAHO TRANSPORTATION DEPARTMENT
YOUR Safety→YOUR Mobility→YOUR Economic Opportunity

APPROVED BY: _____ DATE: _____

ENGLISH
PROJECT NO.

ASPHALTIC PLUG EXPANSION JOINT

BRIDGE LRFD DESIGN MANUAL, B14.6

BRIDGE PLANS	
BRIDGE KEY NO.	
COUNTY	KEY NO.
BRIDGE DWG. NO.	SHEET OF