

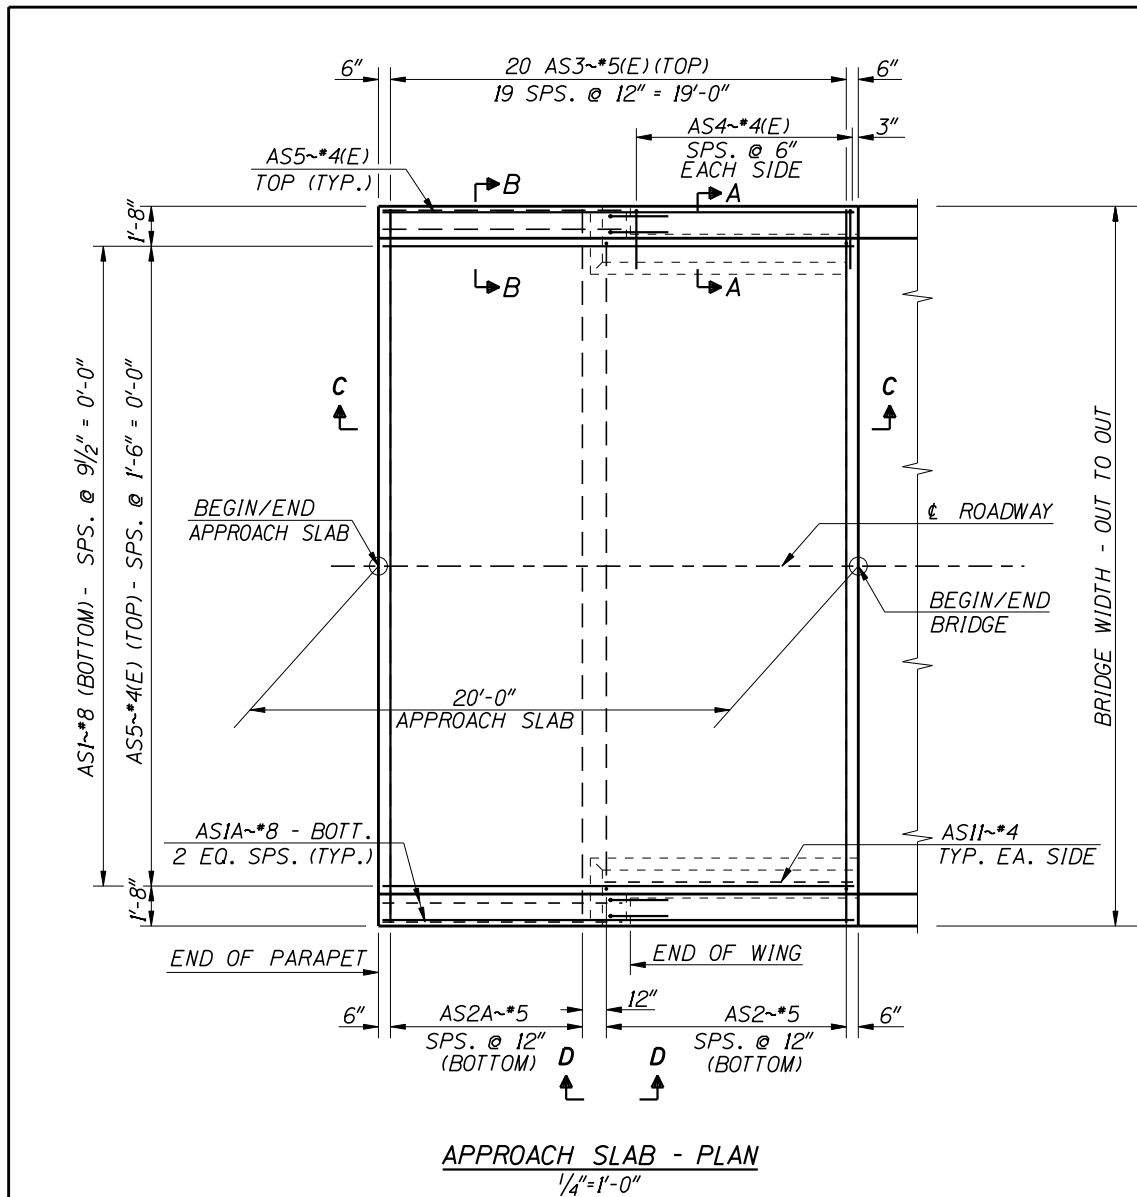
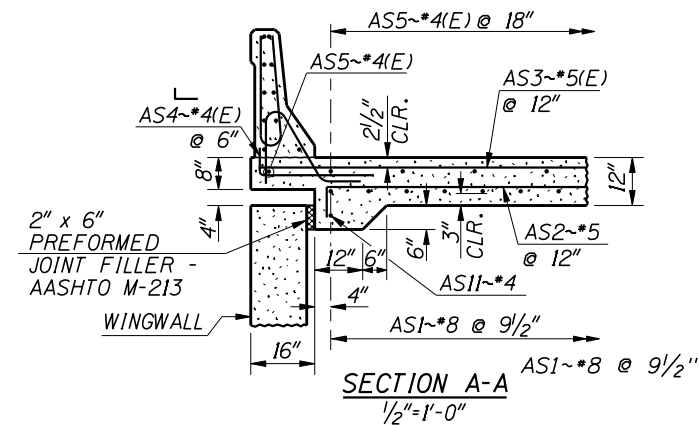
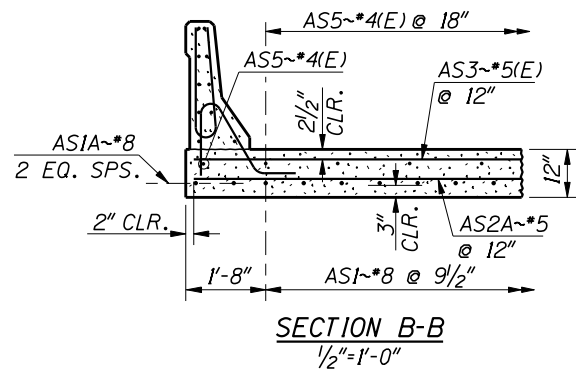
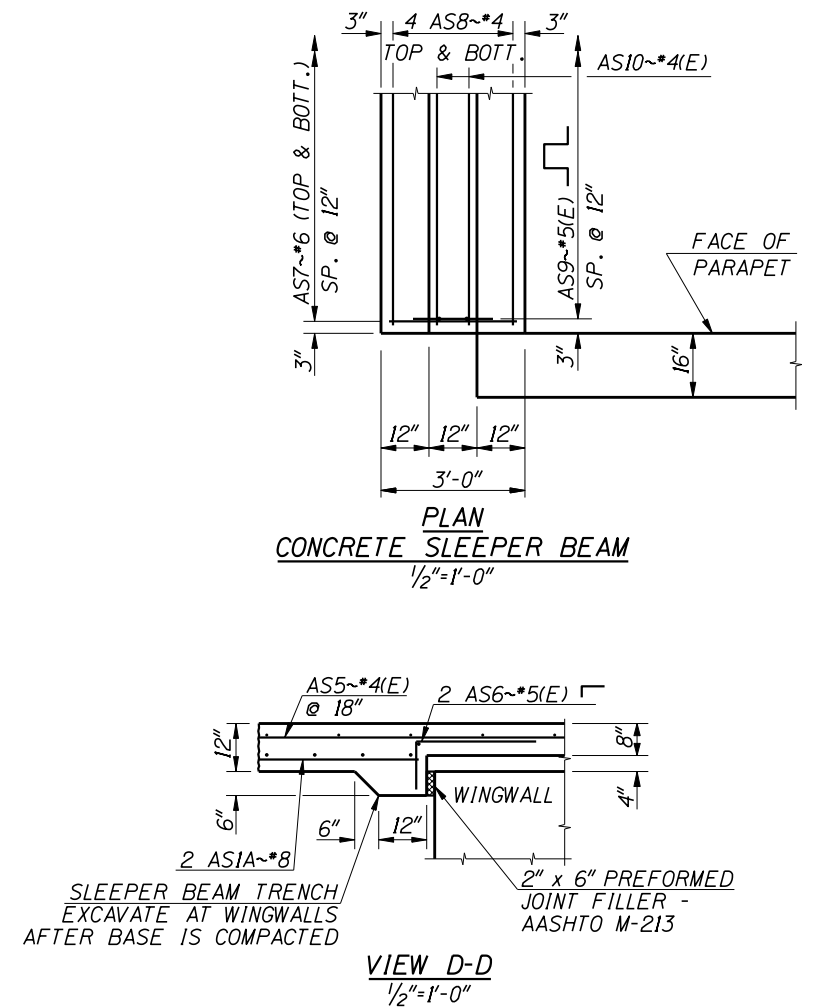


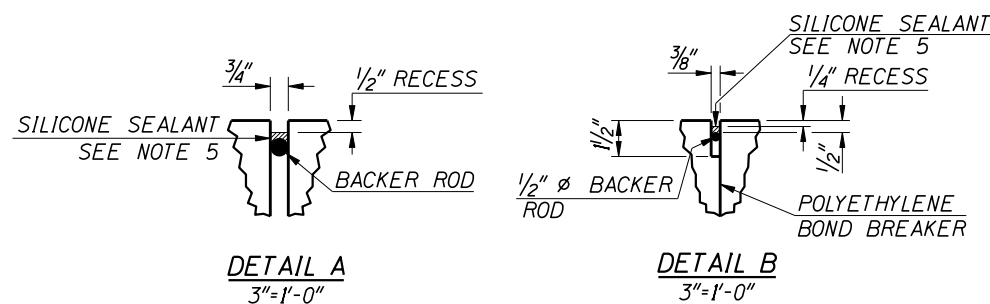

APPROXIMATE QUANTITIES	
CONCRETE	0 CY
PLAIN REINF.	0 LB
EPOXY REINF.	0 LB

NOTES

- BEFORE POURING THE APPROACH SLAB, PROVIDE A 2' DEEP BASE OF GRANULAR MATERIAL COMPACTED TO MEET CLASS "A" COMPACTION REQUIREMENTS.
- PLACE LONGITUDINAL REINFORCEMENT PARALLEL TO THE CENTERLINE OF THE ROADWAY; PLACE THE TRANSVERSE REINFORCEMENT PARALLEL TO THE ABUTMENT.
- ALL REINFORCEMENT SHALL BE AASHTO M31 (ASTM A615) GRADE 60. THE TOP MAT OF BOTH TRANSVERSE AND LONGITUDINAL REINFORCEMENT SHALL BE EPOXY COATED. ALL BEND DETAILS TO BE ACCORDING TO THE LATEST A.C.I. STANDARD PRACTICE AND AASHTO SPECIFICATIONS.
- APPROACH SLAB CONCRETE SHALL BE CLASS 40A.
- SILICONE JOINT SEAL SHALL BE DOW CORNING 902, WATSON BOWMAN SILICONE SEALANT, OR APPROVED EQUAL. THE JOINT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.
- PLACE POLYETHYLENE BOND BREAKER OR FILTER FABRIC BETWEEN APPROACH SLAB AND SUBGRADE.
- APPROACH SLAB WILL BE MEASURED BY THE SQUARE YARD, COMPLETE IN PLACE AND WILL BE PAID FOR UNDER THE BID ITEM 502-435A.

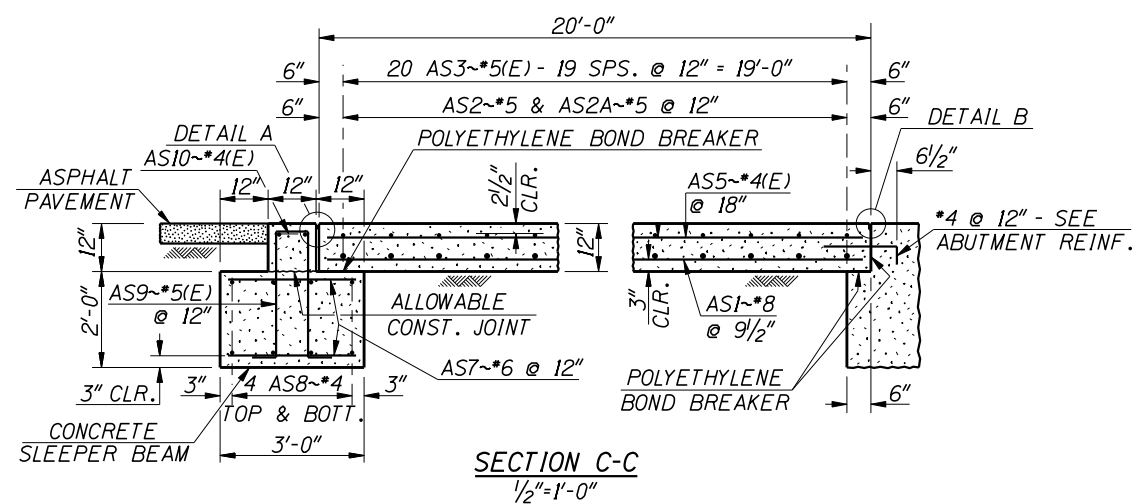

REVISIONS				DESIGNED	SCALES SHOWN	ORIGINAL	IDaho TRANSPORTATION DEPARTMENT	<i>English</i>	PROJECT NO.	APPROACH SLAB DETAILS - ASPHALT PAVEMENT	BRIDGE PLANS
NO.	DATE	BY	DESCRIPTION	DESIGN CHECKED	ARE FOR 34" X 22" PRINTS ONLY	SIGNED BY:					
△				DESIGNED	CADD FILE NO.						BRIDGE LRFD MANUAL, PAGE B2.1A
△				DESIGNED	prj00000\bridge\						COUNTY
△				DESIGNED	b02_1a.dgn						ABC
△				DESIGNED	DRAWING DATE:						KEY NO.
△				DESIGNED	DEC 2002						0000
△				DESIGNED	DATE SIGNED: DATE						BRIDGE DRAWING NO.
△				DESIGNED	DATE SIGNED: DATE						00000
△				DESIGNED	DATE SIGNED: DATE						SHEET
△				DESIGNED	DATE SIGNED: DATE						0 OF 0